


**N-Channel Logic Level Enhancement Mode Field Effect Transistor****PRODUCT SUMMARY**

V _{DS}	I _D	R _{DS(ON)} (mΩ) Max
200V	22A	65 @ V _{GS} =10V

FEATURES

- Super high dense cell design for low R_{DS(ON)}.
- Rugged and reliable.
- TO-263 package.

**ABSOLUTE MAXIMUM RATINGS (T_C=25°C unless otherwise noted)**

Symbol	Parameter		Limit	Units
V _{DS}	Drain-Source Voltage		200	V
V _{GS}	Gate-Source Voltage		±20	V
I _D	Drain Current-Continuous ^c	Tc=25°C	22	A
		Tc=70°C	18.4	A
I _{DM}	-Pulsed ^{a c}		64	A
E _{AS}	Single Pulse Avalanche Energy ^d		110	mJ
P _D	Maximum Power Dissipation	Tc=25°C	75	W
		Tc=70°C	52.5	W
T _J , T _{STG}	Operating Junction and Storage Temperature Range		-55 to 175	°C

THERMAL CHARACTERISTICS

R _{θJC}	Thermal Resistance, Junction-to-Case	2	°C/W
R _{θJA}	Thermal Resistance, Junction-to-Ambient	62.5	°C/W

STB520N

Ver 1.0

ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	200			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =160V , V _{GS} =0V			1	uA
I _{GSS}	Gate-Body leakage current	V _{GS} = ±20V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	2.0	2.5	4.0	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V , I _D =11A		52	65	m ohm
g _{FS}	Forward Transconductance	V _{DS} =10V , I _D =11A		58		S
DYNAMIC CHARACTERISTICS ^b						
C _{ISS}	Input Capacitance	V _{DS} =25V,V _{GS} =0V f=1.0MHz		4750		pF
C _{OSS}	Output Capacitance			245		pF
C _{RSS}	Reverse Transfer Capacitance			183		pF
SWITCHING CHARACTERISTICS ^b						
t _{D(ON)}	Turn-On DelayTime	V _{DD} =100V I _D =1A V _{GS} =10V R _{GEN} = 6 ohm		96		ns
t _r	Rise Time			92		ns
t _{D(OFF)}	Turn-Off DelayTime			175		ns
t _f	Fall Time			38		ns
Q _g	Total Gate Charge	V _{DS} =100V,I _D =11A,V _{GS} =10V		76		nC
Q _{gs}	Gate-Source Charge	V _{DS} =100V,I _D =11A, V _{GS} =10V		8.2		nC
Q _{gd}	Gate-Drain Charge			23		nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
V _{SD}	Diode Forward Voltage	V _{GS} =0V,I _S =6A		0.74	1.3	V
Notes						
a.Pulse Test:Pulse Width ≤ 10us, Duty Cycle ≤ 1%.						
b.Guaranteed by design, not subject to production testing.						
c.Drain current limited by maximum junction temperature.						
d.Starting T _J =25°C,L=0.5mH,V _{DD} = 50V.						
e.Mounted on FR4 Board of 1 inch ² , 2oz.						

Jul,07,2016

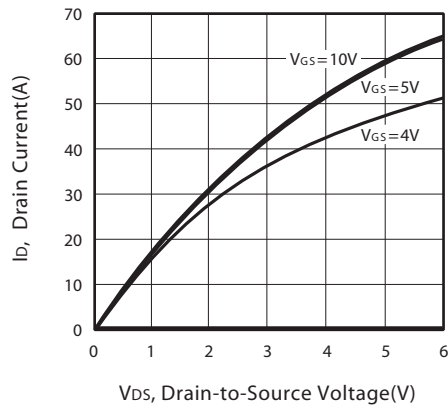


Figure 1. Output Characteristics

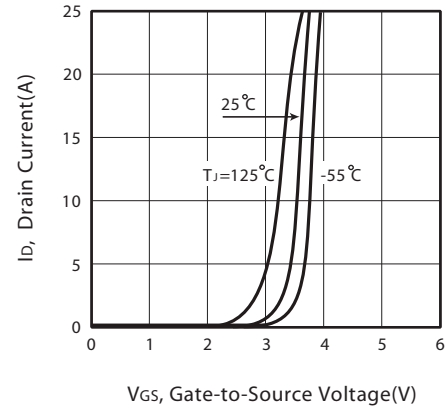


Figure 2. Transfer Characteristics

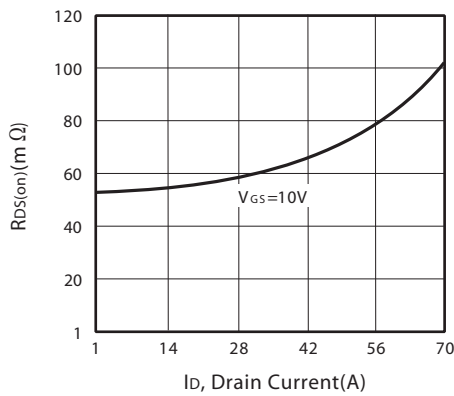


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

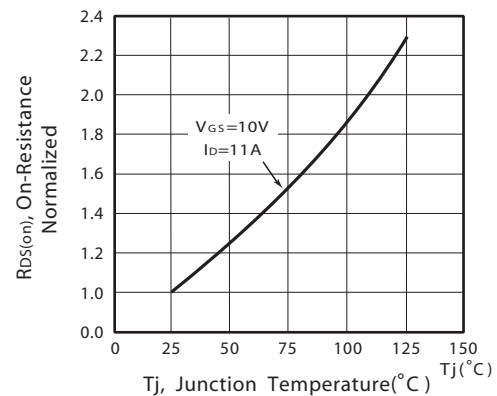


Figure 4. On-Resistance Variation with Drain Current and Temperature

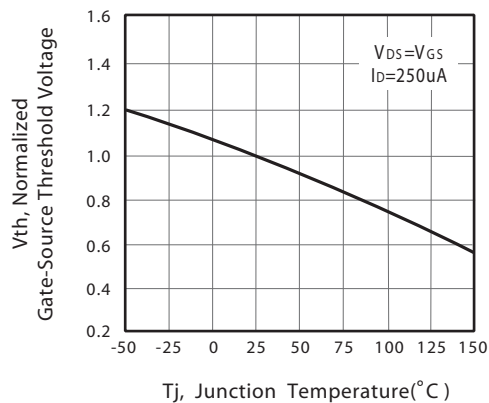


Figure 5. Gate Threshold Variation with Temperature

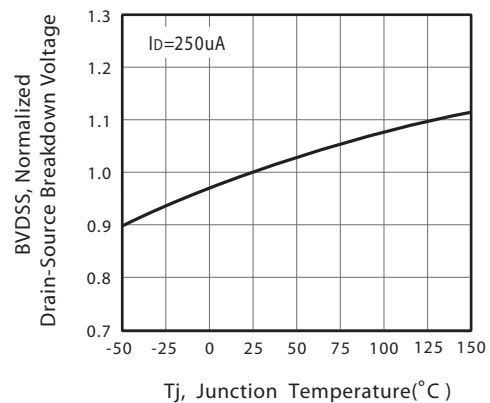


Figure 6. Breakdown Voltage Variation with Temperature

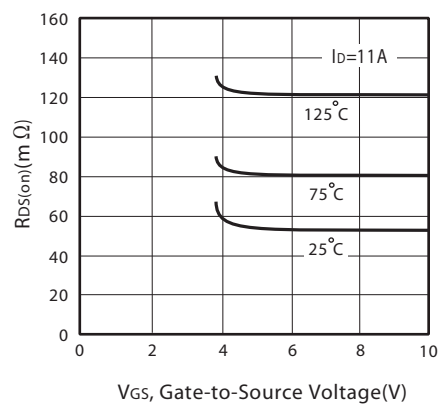


Figure 7. On-Resistance vs. Gate-Source Voltage

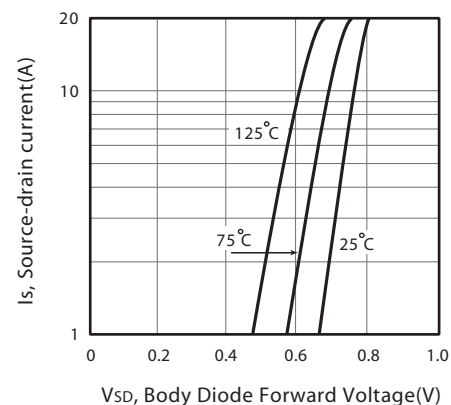


Figure 8. Body Diode Forward Voltage Variation with Source Current

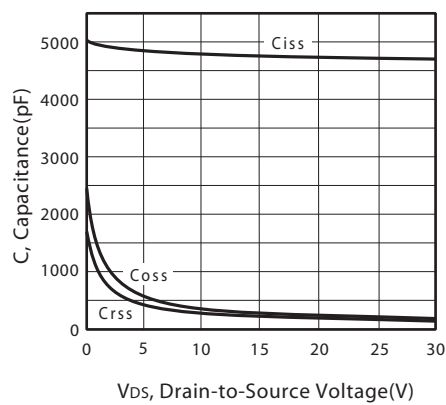


Figure 9. Capacitance

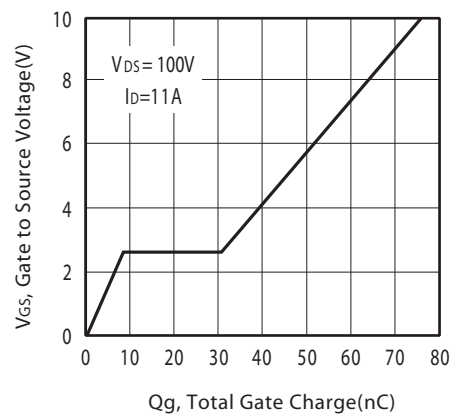


Figure 10. Gate Charge

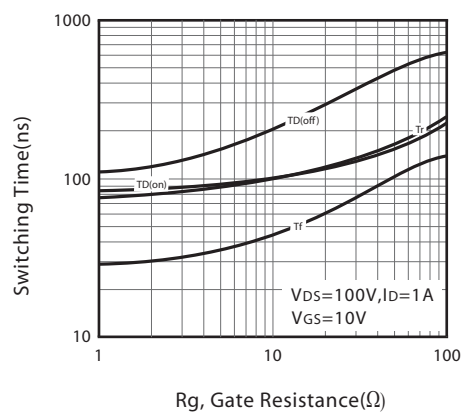


Figure 11. switching characteristics



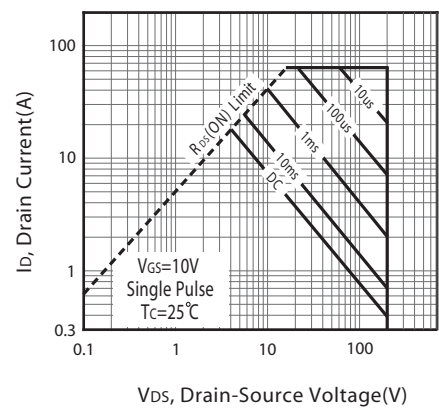


Figure 12. Maximum Safe Operating Area

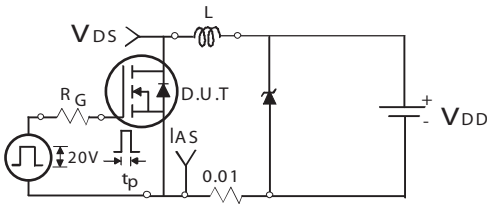

Unclamped Inductive Test Circuit

Figure 13a.

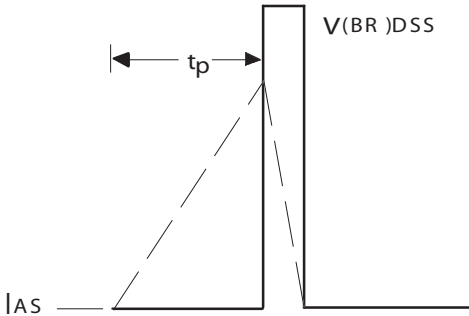

Unclamped Inductive Waveforms

Figure 13b.


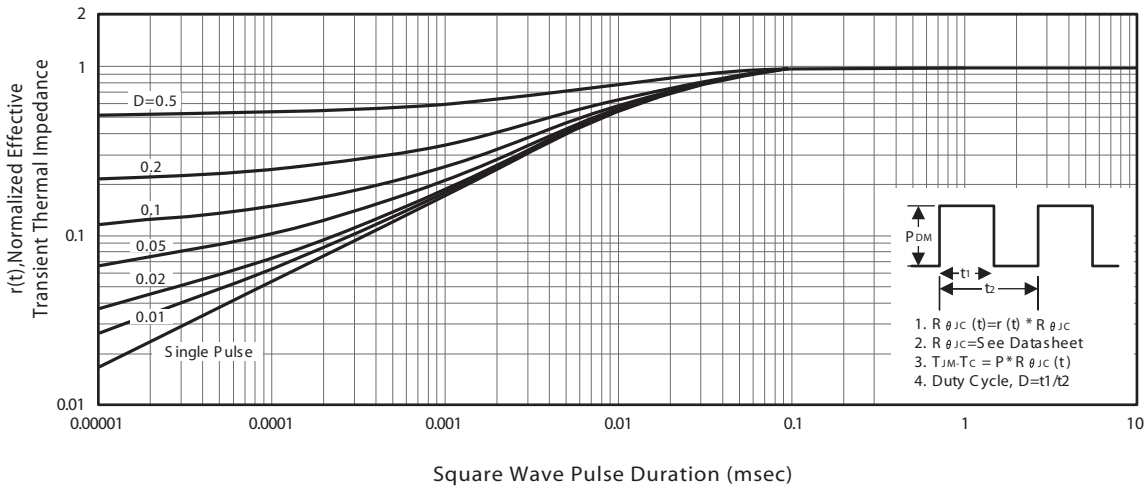


Figure 14. Normalized Thermal Transient Impedance Curve

PACKAGE OUTLINE DIMENSIONS

TO-263AB

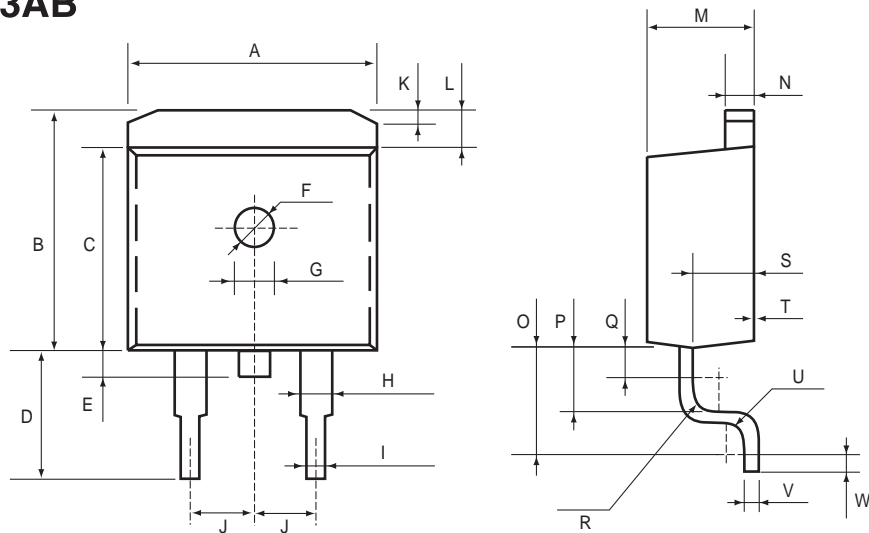


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.9	10.5	0.390	0.413
B	9.5	10.3	0.374	0.406
C	8.3	8.9	0.327	0.350
D	4.7	5.5	0.185	0.217
E	1.5		0.059	
F	ϕ 1.6		ϕ 0.063	
G	1.0	1.4	0.039	0.055
H	1.07	1.47	0.042	0.058
I	0.76	1.06	0.030	0.042
J	2.04	3.04	0.080	0.120
K	0.2	0.6	0.0079	0.024
L	1.4		0.055	
M	4.24	4.64	0.167	0.183
N	1.15	1.45	0.045	0.057
O	3.25	3.75	0.128	0.148
P	2.3		0.091	
Q	1.6		0.063	
R	R0.4	R1.0	R0.0158	R0.0394
S	2.7 MAX		0.106 MAX	
T	0.0	0.3	0.0000	0.0118
U	R0.4	R1.0	R0.0158	R0.0394
V	0.3	0.5	0.0118	0.0197
W	1.2 min		0.047 min	

STB520N

Ver 1.0

TO263AB Tube

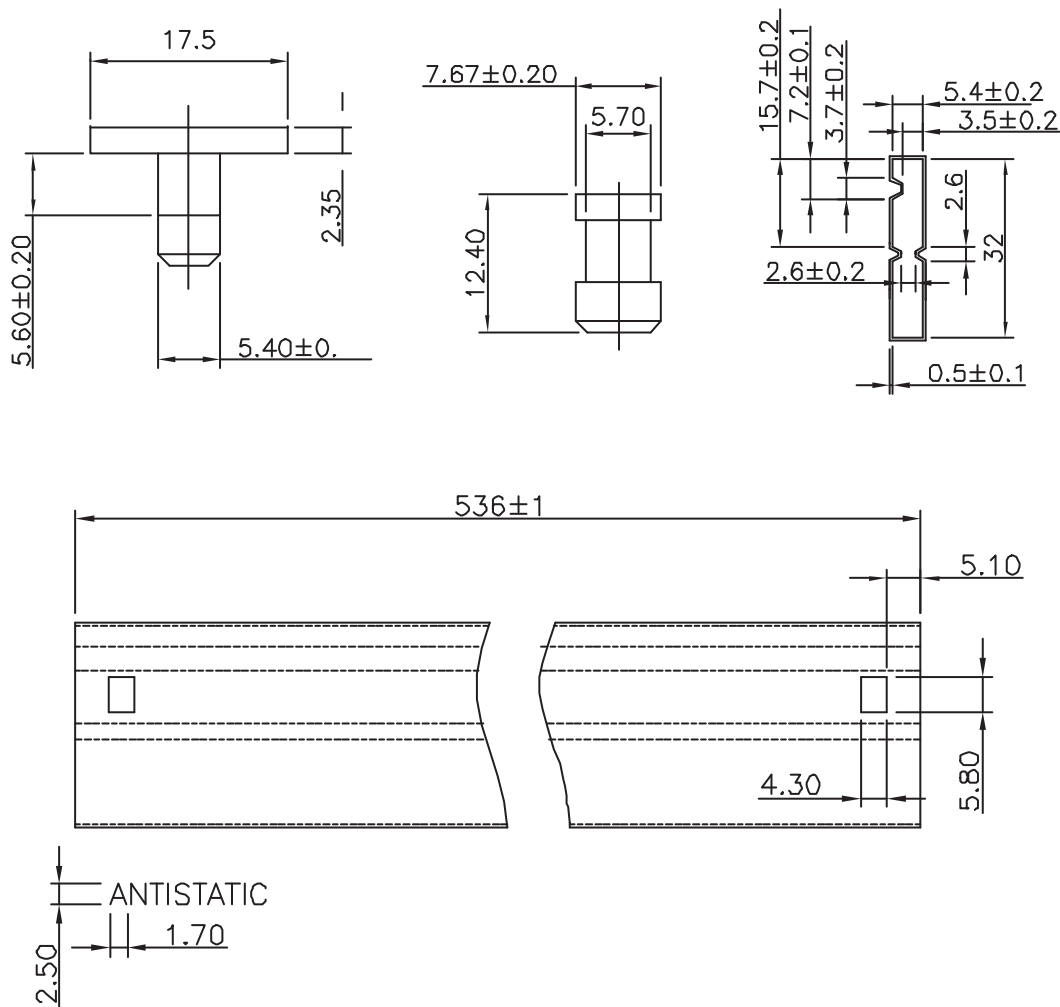


Jul,07,2016

STB520N

Ver 1.0

TOP MARKING DEFINITION

TO-263

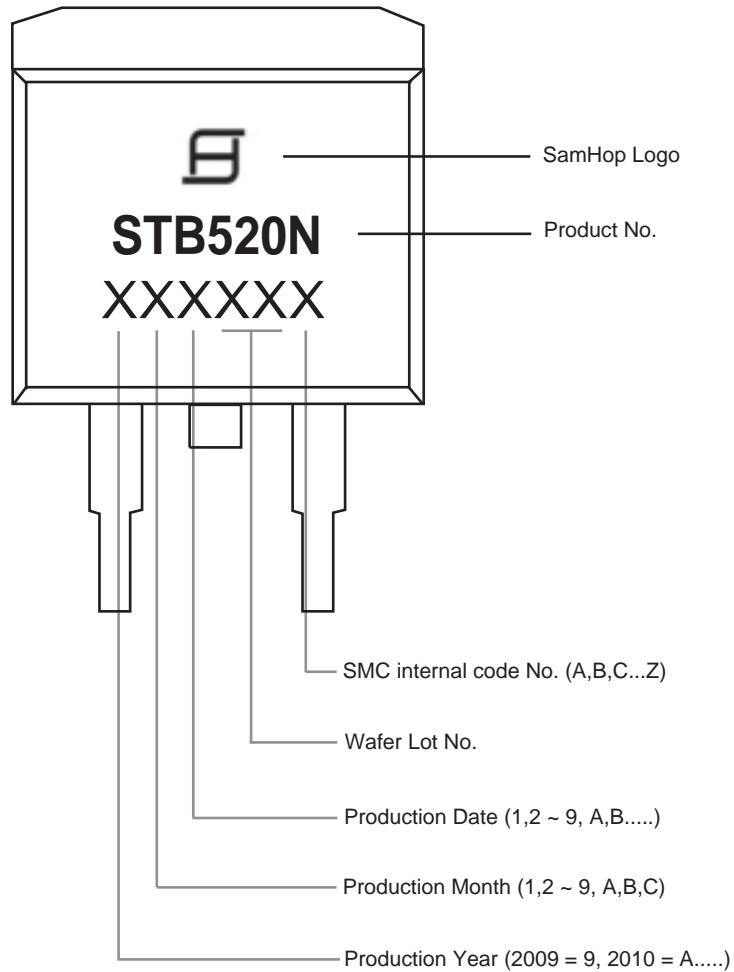

Jul,07,2016