





Dual N-Channel Enhancement Mode Field Effect Transistor

PRODUCT SUMMARY

V _{DSS}	I _D	R _{DS(ON)} (mΩ) Max
75V	2.5A	210 @ V _{GS} =10V
		250 @ V _{GS} =4.5V

FEATURES

- Super high dense cell design for low R_{DS(ON)}.
- Rugged and reliable.
- Surface Mount Package.



ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Symbol	Parameter	Limit	Units
V _{DS}	Drain-Source Voltage	75	V
V _{GS}	Gate-Source Voltage	±20	V
I _D	Drain Current-Continuous ^c	T _A =25°C	2.5
		T _A =70°C	2.0
I _{DM}	-Pulsed ^{a c}	10	A
E _{AS}	Single Pulse Avalanche Energy ^d	16	mJ
P _D	Maximum Power Dissipation	T _A =25°C	2.5
		T _A =70°C	1.6
T _J , T _{STG}	Operating Junction and Storage Temperature Range	-55 to 150	°C

THERMAL CHARACTERISTICS

R _{θJA}	Thermal Resistance, Junction-to-Ambient	50	°C/W
------------------	---	----	------

SP2700

Ver 1.0

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	75			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =60V , V _{GS} =0V			1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	1	2	3	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V , I _D =1.25A		178	210	m ohm
		V _{GS} =4.5V , I _D =1.15A		195	250	m ohm
g _{FS}	Forward Transconductance	V _{DS} =10V , I _D =1.25A		5.3		S
DYNAMIC CHARACTERISTICS ^b						
C _{iss}	Input Capacitance	V _{DS} =25V, V _{GS} =0V f=1.0MHz		480		pF
C _{oss}	Output Capacitance			28		pF
C _{rSS}	Reverse Transfer Capacitance			22		pF
SWITCHING CHARACTERISTICS ^b						
t _{D(ON)}	Turn-On Delay Time	V _{DD} =37.5V I _D =1A V _{GS} =10V R _{GEN} = 6 ohm		11.5		ns
t _r	Rise Time			10.7		ns
t _{D(OFF)}	Turn-Off Delay Time			19		ns
t _f	Fall Time			7.8		ns
Q _g	Total Gate Charge	V _{DS} =37.5V, I _D =1.25A, V _{GS} =10V		7.8		nC
		V _{DS} =37.5V, I _D =1.25A, V _{GS} =4.5V		4		nC
Q _{gs}	Gate-Source Charge	V _{DS} =37.5V, I _D =1.25A, V _{GS} =10V		1.2		nC
Q _{gd}	Gate-Drain Charge			2		nC
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _S =1A		0.81	1.2	V

Notes

- Pulse Test: Pulse Width ≤ 10us, Duty Cycle ≤ 1%.
- Guaranteed by design, not subject to production testing.
- Drain current limited by maximum junction temperature.
- Starting T_J=25°C, L=0.5mH, V_{DD} = 40V. (See Figure13)
- Mounted on FR4 Board of 1 inch², 2oz.

Jun, 19, 2014

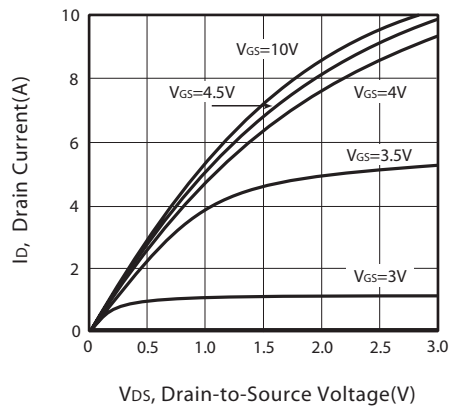


Figure 1. Output Characteristics

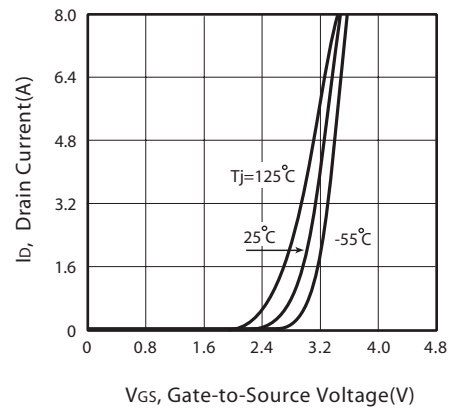


Figure 2. Transfer Characteristics

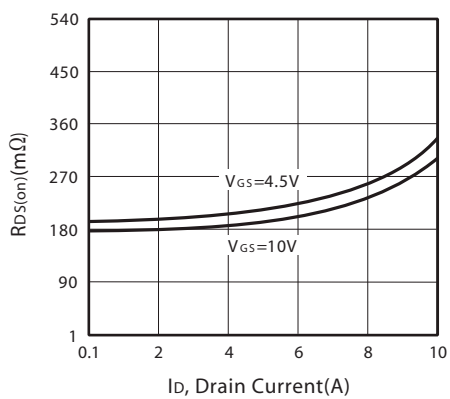


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

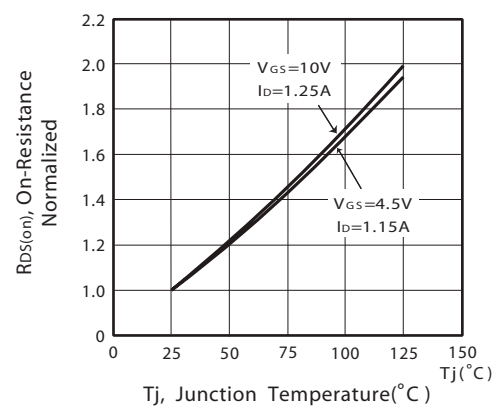


Figure 4. On-Resistance Variation with Drain Current and Temperature

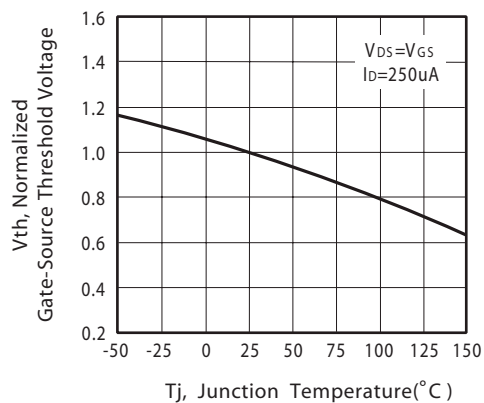


Figure 5. Gate Threshold Variation with Temperature








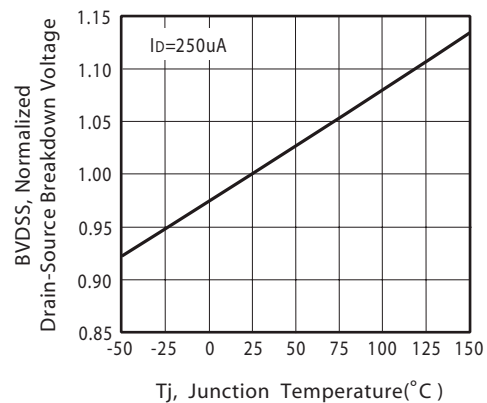



Figure 6. Breakdown Voltage Variation with Temperature

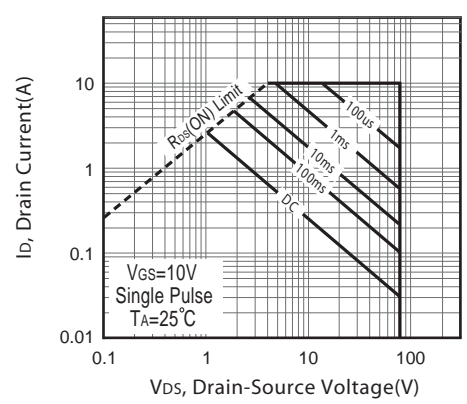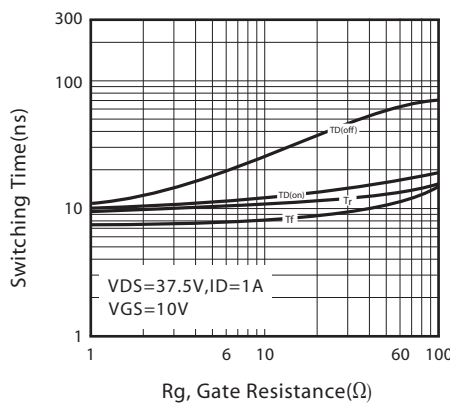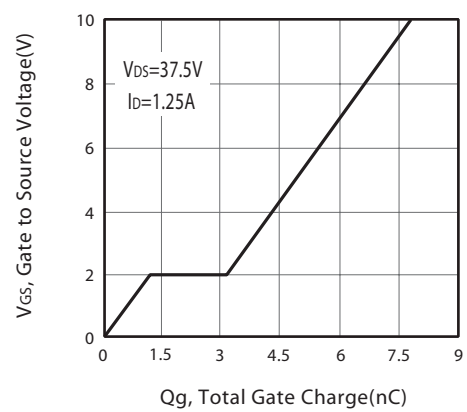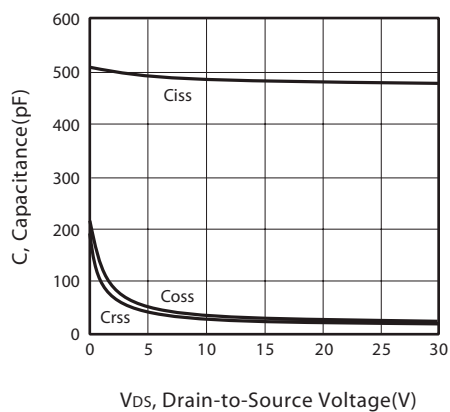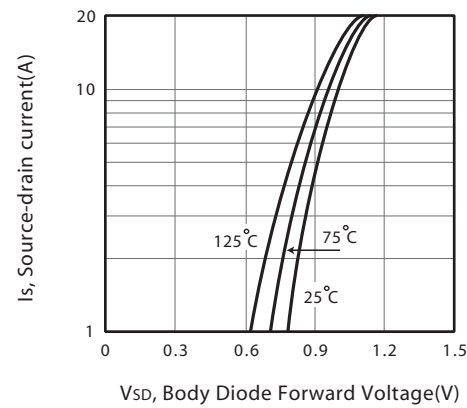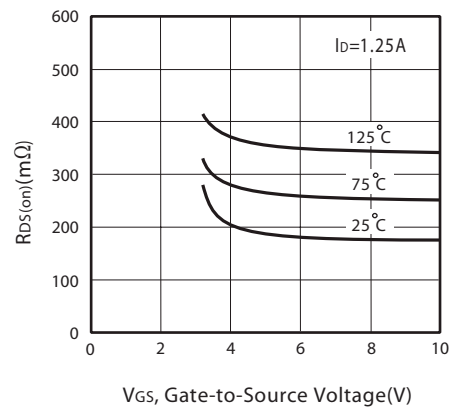

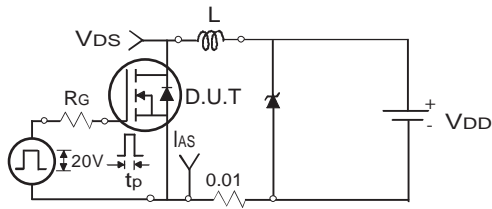

Uncamped Inductive Test Circuit

Figure 13a.

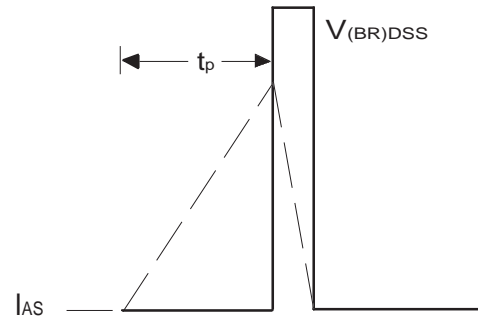

Unclamped Inductive Waveforms

Figure 13b.


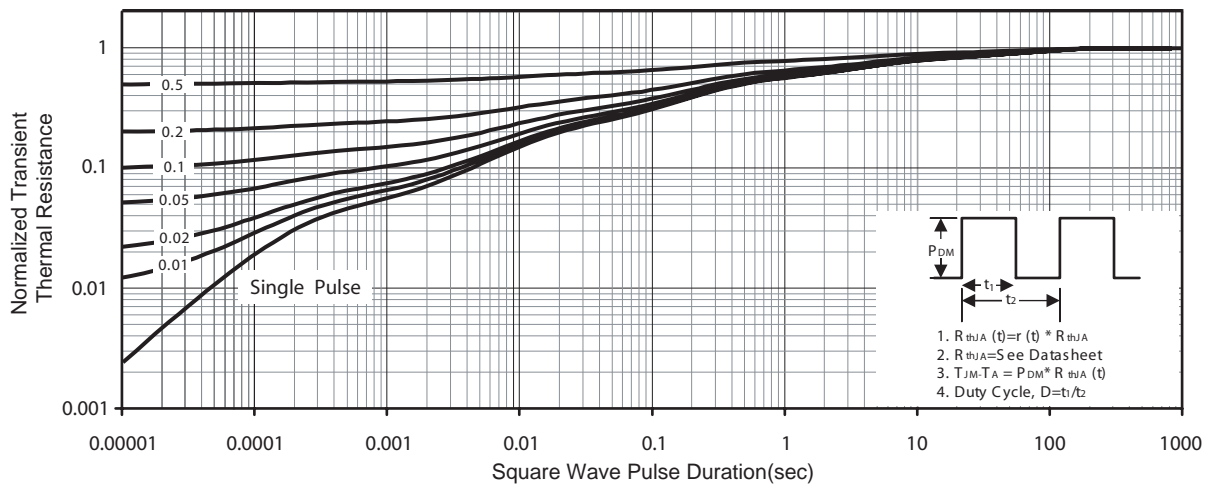


Figure 14. Normalized Thermal Transient Impedance Curve

PACKAGE OUTLINE DIMENSIONS

PDFN 5x6-8L

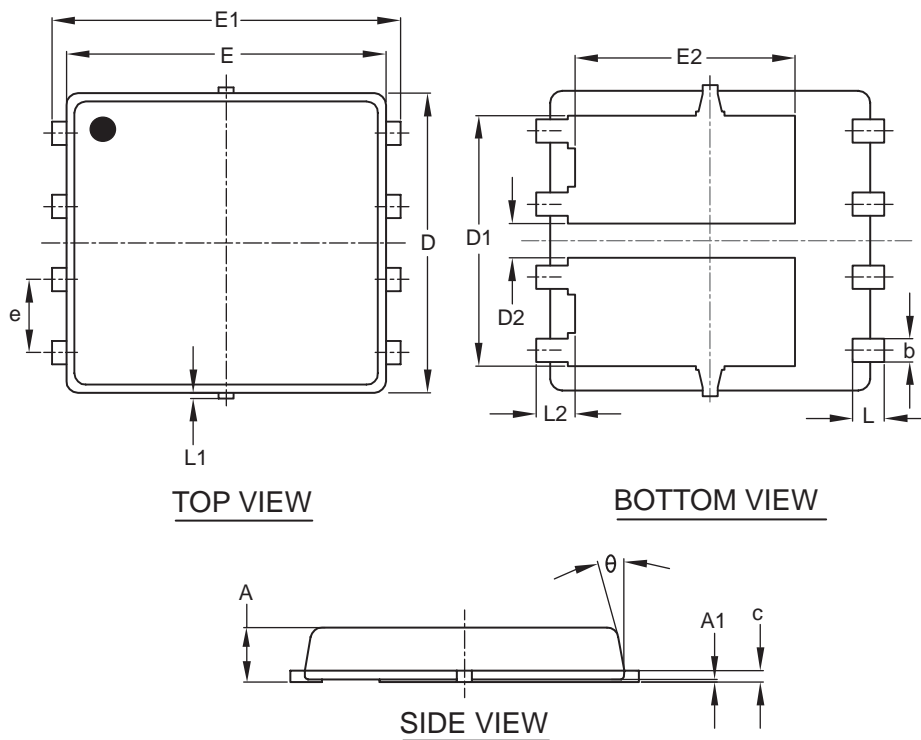

SYMBOLS	MILLIMETERS		
	MIN	NOM	MAX
A	0.85	0.95	1.00
A1	0.00	—	0.05
b	0.30	0.40	0.50
c	0.15	0.20	0.25
D	5.20 BSC		
D1	4.35 BSC		
D2	0.50	0.60	0.75
E	5.55 BSC		
E1	6.05 BSC		
E2	3.82 BSC		
e	1.27 BSC		
L	0.45	0.55	0.65
L1	0.00	—	0.15
L2	0.68 REF		
θ	0°	—	10°

TOP MARKING DEFINITION

PDFN 5x6-8L

