



SamHop Microelectronics Corp.



SRD10U120PHS SRD10U120FHS

Ver 1.1


Trench Barrier Schottky Rectifier

PRODUCT SUMMARY

V _{RRM}	I _O	V _F (MAX) @ 25°C	I _R (MAX) @ 25°C
120V	10A	0.84V	0.01mA

FEATURES

- Low forward voltage drop
- High forward surge capability
- Excellent High Temperature Stability

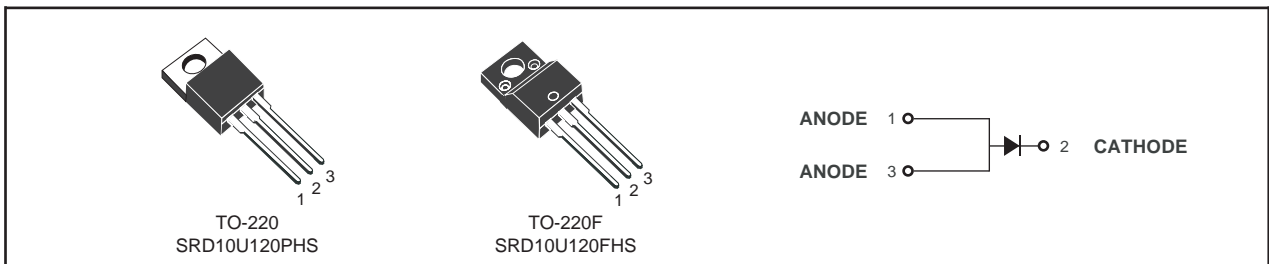

ABSOLUTE MAXIMUM RATINGS (T_C=25°C unless otherwise specified)

Symbol	Parameter	Value	Unit
V _{RRM}	Peak Repetitive Reverse Voltage	120	V
V _{RWM}	Working Peak Reverse Voltage	120	V
V _{RM}	DC Blocking Voltage	120	V
V _{R(RMS)}	RMS Reverse Voltage	84	V
I _O	Average Rectified Output Current	10	A
I _{FSM}	Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	150	A

THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Unit
R _{θJC}	Thermal Resistance, Junction-to-Ambient	TO-220	2 °C/W
		TO-220F	6 °C/W
T _J	Operating Temperature Range	-55 to 150	°C
T _{STG}	Storage Temperature Range	-55 to 175	°C

ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _F	Forward Voltage Drop	I _F = 10A, T _J = 25°C		0.79	0.84	V
		I _F = 10A, T _J = 125°C		0.65	0.70	V
I _R	Leakage Current	V _R = 120V, T _J = 25°C		2.4	10	uA
		V _R = 120V, T _J = 125°C			8	mA

Details are subject to change without notice.

Mar,27,2015

SRD10U120PHS

SRD10U120FHS

Ver 1.1

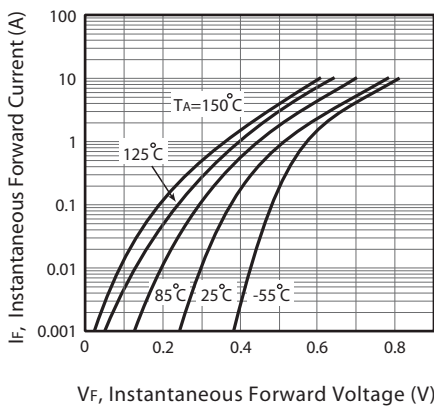


Figure 1. Typical Forward Characteristics

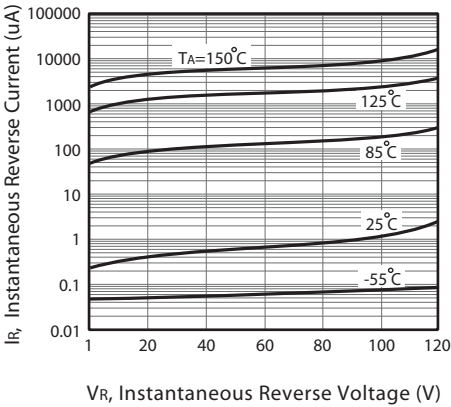


Figure 2. Typical Reverse Characteristics

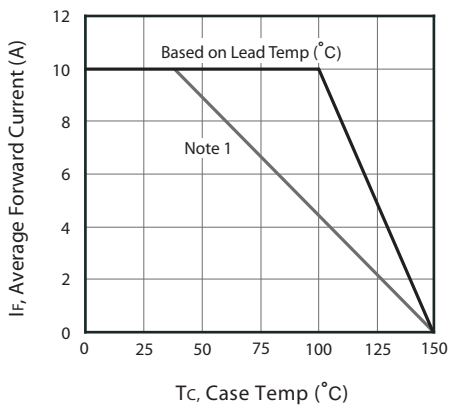


Figure 3. Forward Current Derating Curve

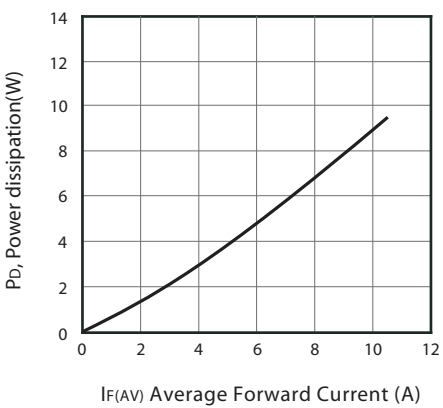


Figure 4. Forward Power Dissipation

Note : 1.Device mounted on FR-4 substrate, 2oz copper.

Mar,27,2015


SRD10U120PHS

SRD10U120FHS

Ver 1.1

PACKAGE OUTLINE DIMENSIONS

TO-220

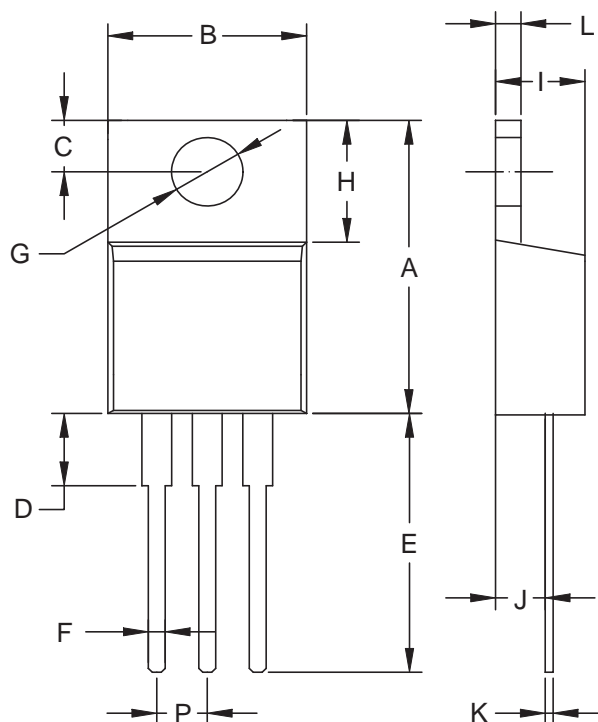

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	14.55	15.32	0.573	0.603
B	-	10.50	-	0.412
C	2.62	2.87	0.103	0.113
D	3.56	4.06	0.140	0.160
E	13.00	14.30	0.510	0.560
F	0.68	0.94	0.027	0.037
G	3.74	3.91	0.148	0.154
H	5.84	6.86	0.230	0.270
I	4.44	4.86	0.175	0.185
J	2.54	2.79	0.100	0.110
K	0.35	0.64	0.014	0.025
L	1.14	1.40	0.045	0.055
P	2.41	2.67	0.095	0.105

Mar,27,2015


SRD10U120PHS

SRD10U120FHS

Ver 1.1

PACKAGE OUTLINE DIMENSIONS

TO-220F

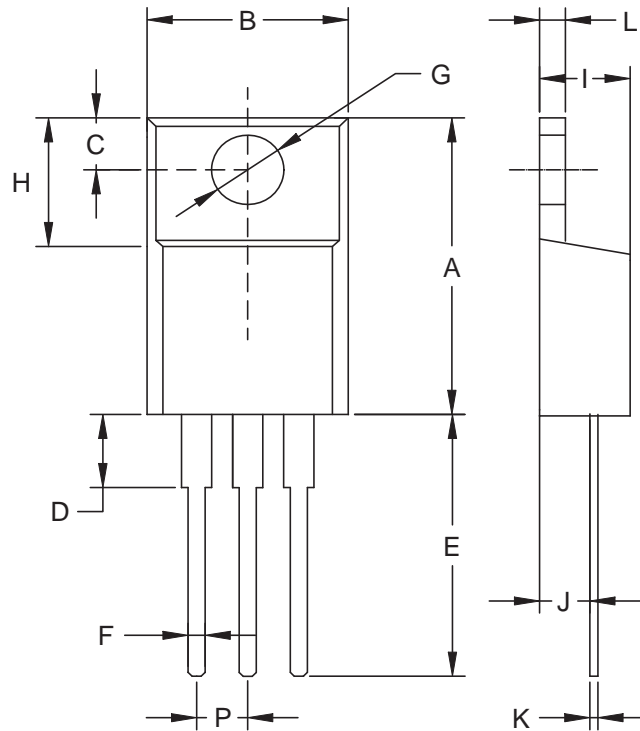

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	14.50	15.50	0.571	0.610
B	9.72	10.30	0.383	0.406
C	2.80	3.20	0.110	0.126
D	3.38	4.10	0.133	0.162
E	13.00	14.00	0.512	0.551
F	0.70	0.90	0.028	0.035
G	2.90	3.50	0.114	0.138
H	6.80	7.40	0.268	0.291
I	4.10	4.70	0.162	0.185
J	2.60	2.80	0.102	0.110
K	0.45	0.65	0.018	0.026
L	2.46	2.86	0.097	0.113
P	2.25	2.85	0.089	0.113

Mar,27,2015


SRD10U120PHS

SRD10U120FHS

Ver 1.1

TOP MARKING DEFINITION

TO-220

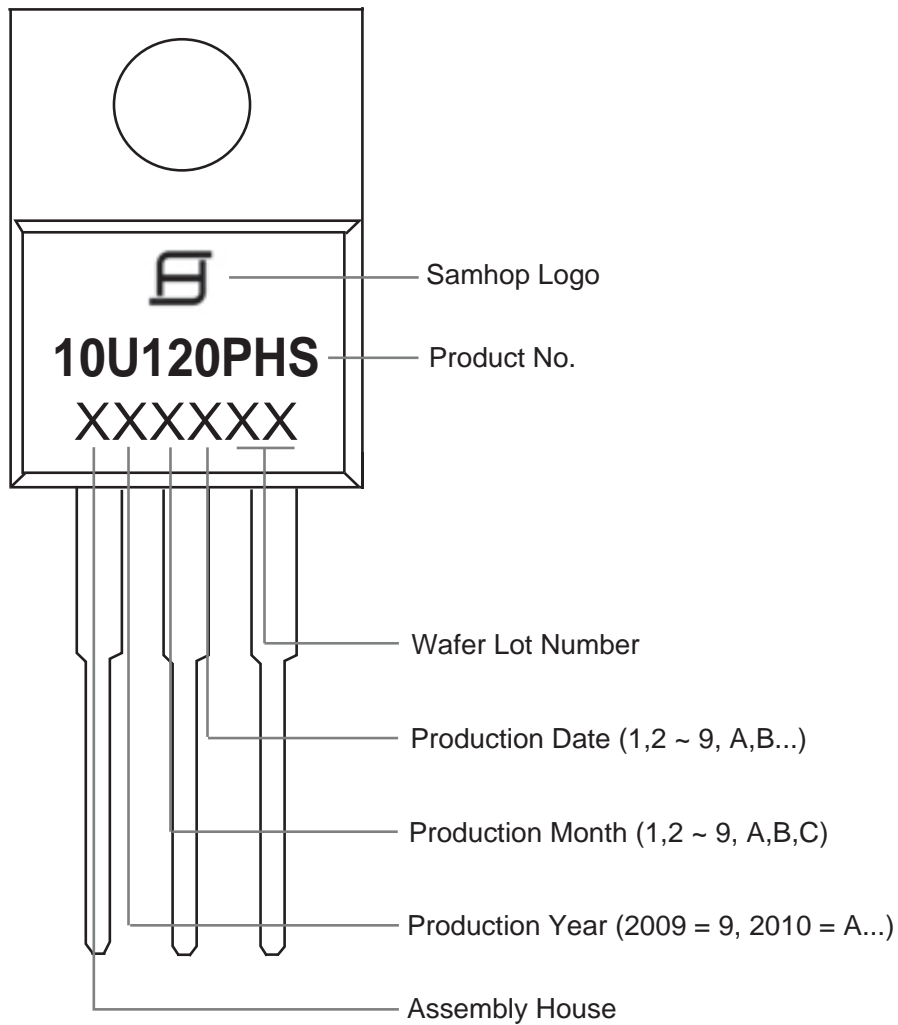

Mar,27,2015


SRD10U120PHS

SRD10U120FHS

Ver 1.1

TOP MARKING DEFINITION

TO-220F

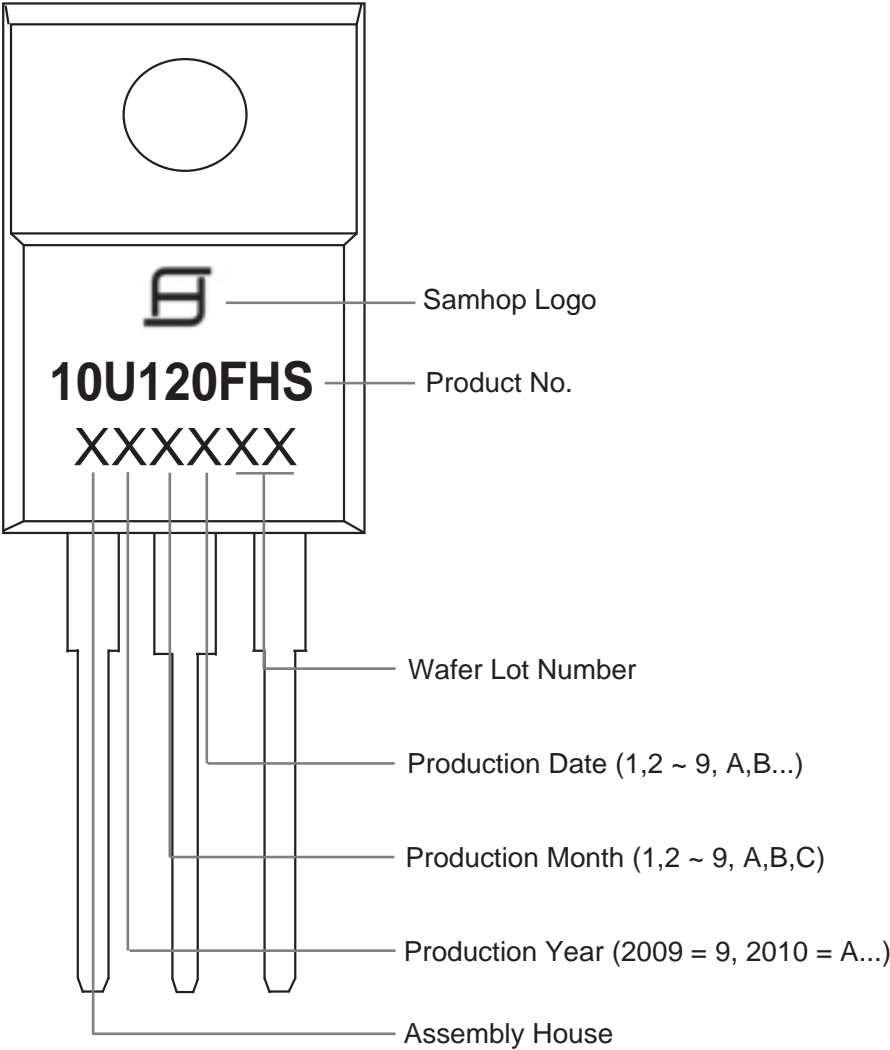

Mar,27,2015