



MOS Controlled Diode

PRODUCT SUMMARY

V _{RRM}	I _O	V _F (MAX) @ 25°C	I _R (MAX) @ 25°C
50V	15A	0.49V	0.5mA

FEATURES

- Low Profile Design for Smart Phone Charger
- Ideal for SMT Mounting
- Low forward voltage drop
- High forward surge capability
- Excellent High Temperature Stability


TO-277



Top View



Bottom View



ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{RRM}	Peak Repetitive Reverse Voltage	50	V
V _{RWM}	Working Peak Reverse Voltage	50	V
V _{RM}	DC Blocking Voltage	50	V
V _{R(RMS)}	RMS Reverse Voltage	35	V
I _O	Average Rectified Output Current	15	A
I _{FSM}	Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	150	A
E _{AS}	Non-Repetitive Avalanche Energy (T _J = 25°C, I _{AS} = 13, L = 5mH)	300	mJ
P _{ARM}	Repetitive Peak Avalanche Energy	30000	W

THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Unit
R _{θJA}	Thermal Resistance, Junction-to-Ambient	70	°C/W
T _J	Operating Temperature Range	-55 to 150	°C
T _{STG}	Storage Temperature Range	-55 to 175	°C

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _F	Forward Voltage Drop	I _F = 15A, T _J = 25°C		0.44	0.49	V
		I _F = 15A, T _J = 125°C		0.42	0.48	V
I _R	Leakage Current	V _R = 50V, T _J = 25°C		130	500	uA
		V _R = 50V, T _J = 125°C			100	mA
C _T	Total Capacitance	V _R = 50V, f = 1MHz		260		pF

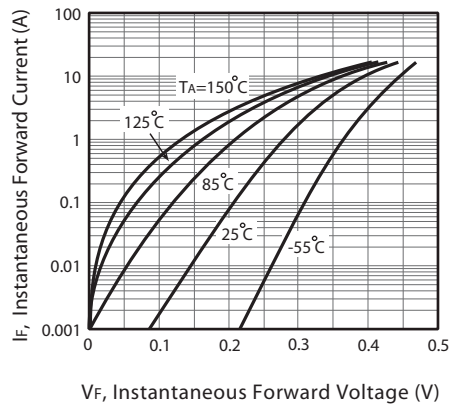


Figure 1. Typical Forward Characteristics

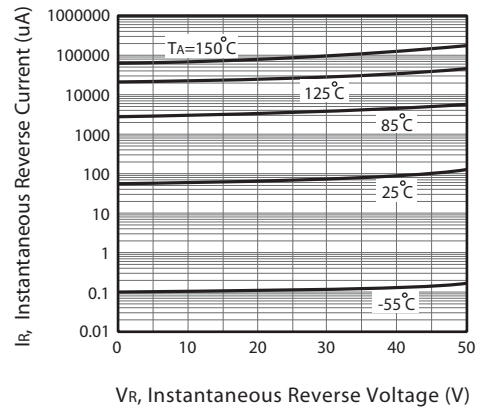


Figure 2. Typical Reverse Characteristics

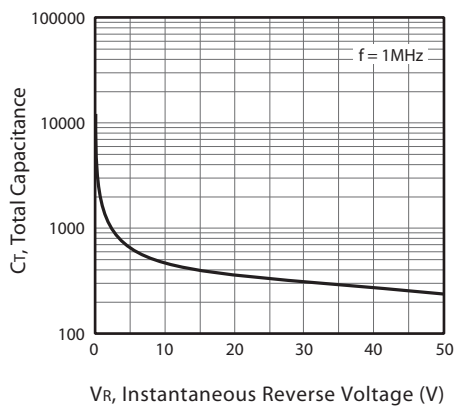


Figure 3. Total Capacitance vs. Reverse Voltage

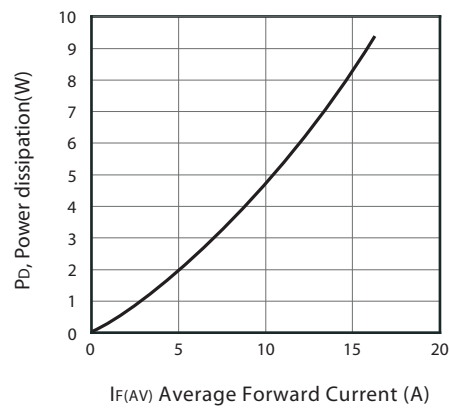


Figure 4. Forward Power Dissipation

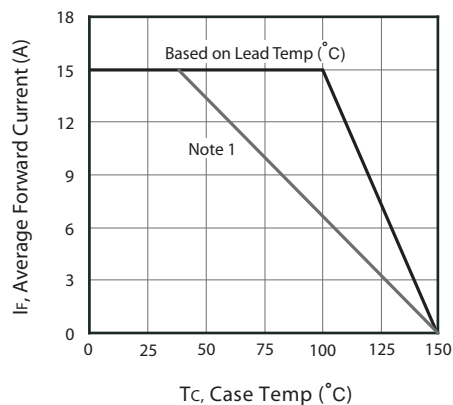


Figure 4. Forward Power Dissipation

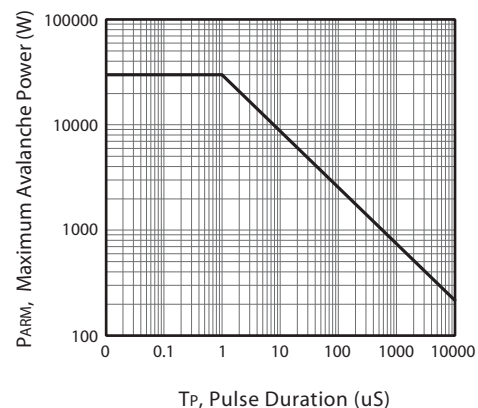


Figure 6. Maximum Avalanche Power Curve



Note : 1.Device mounted on FR-4 substrate, 2oz copper.

SMD15L50SP


Ver 1.0

PACKAGE OUTLINE DIMENSIONS


TO-277

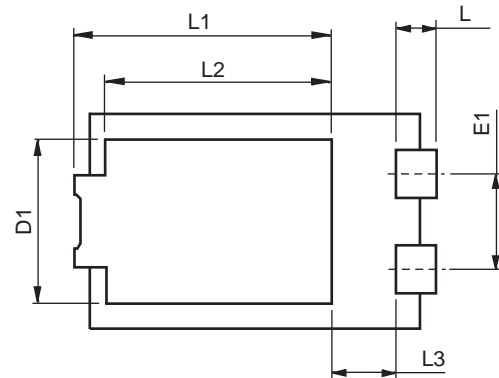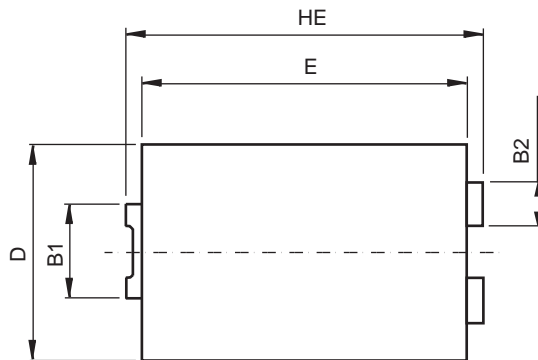

SYMBOLS	MILLIMETERS	
	MIN.	MAX.
HE	6.40	6.60
E	5.60	5.80
D	4.10	4.30
B1	1.70	1.90
B2	0.80	1.00
A	1.05	1.20
C	0.30	0.40
L	0.85	1.10
L1	4.20	4.40
L2	3.52 Typ.	
L3	1.10	1.40
D1	3.00	3.30
E1	1.86 Typ.	

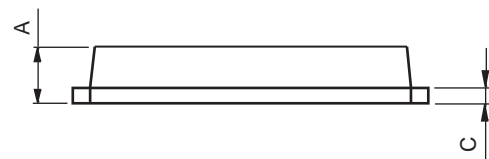

Mounting Pad Layout (unit:mm)

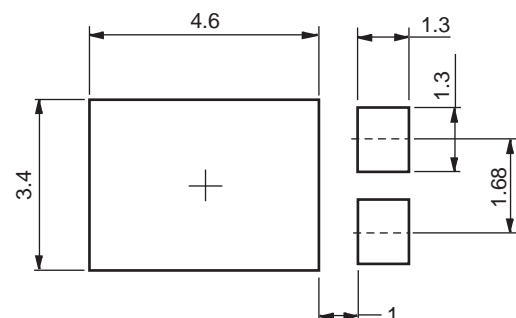


Jul,09,2014

SMD15L50SP

Ver 1.0

TOP MARKING DEFINITION

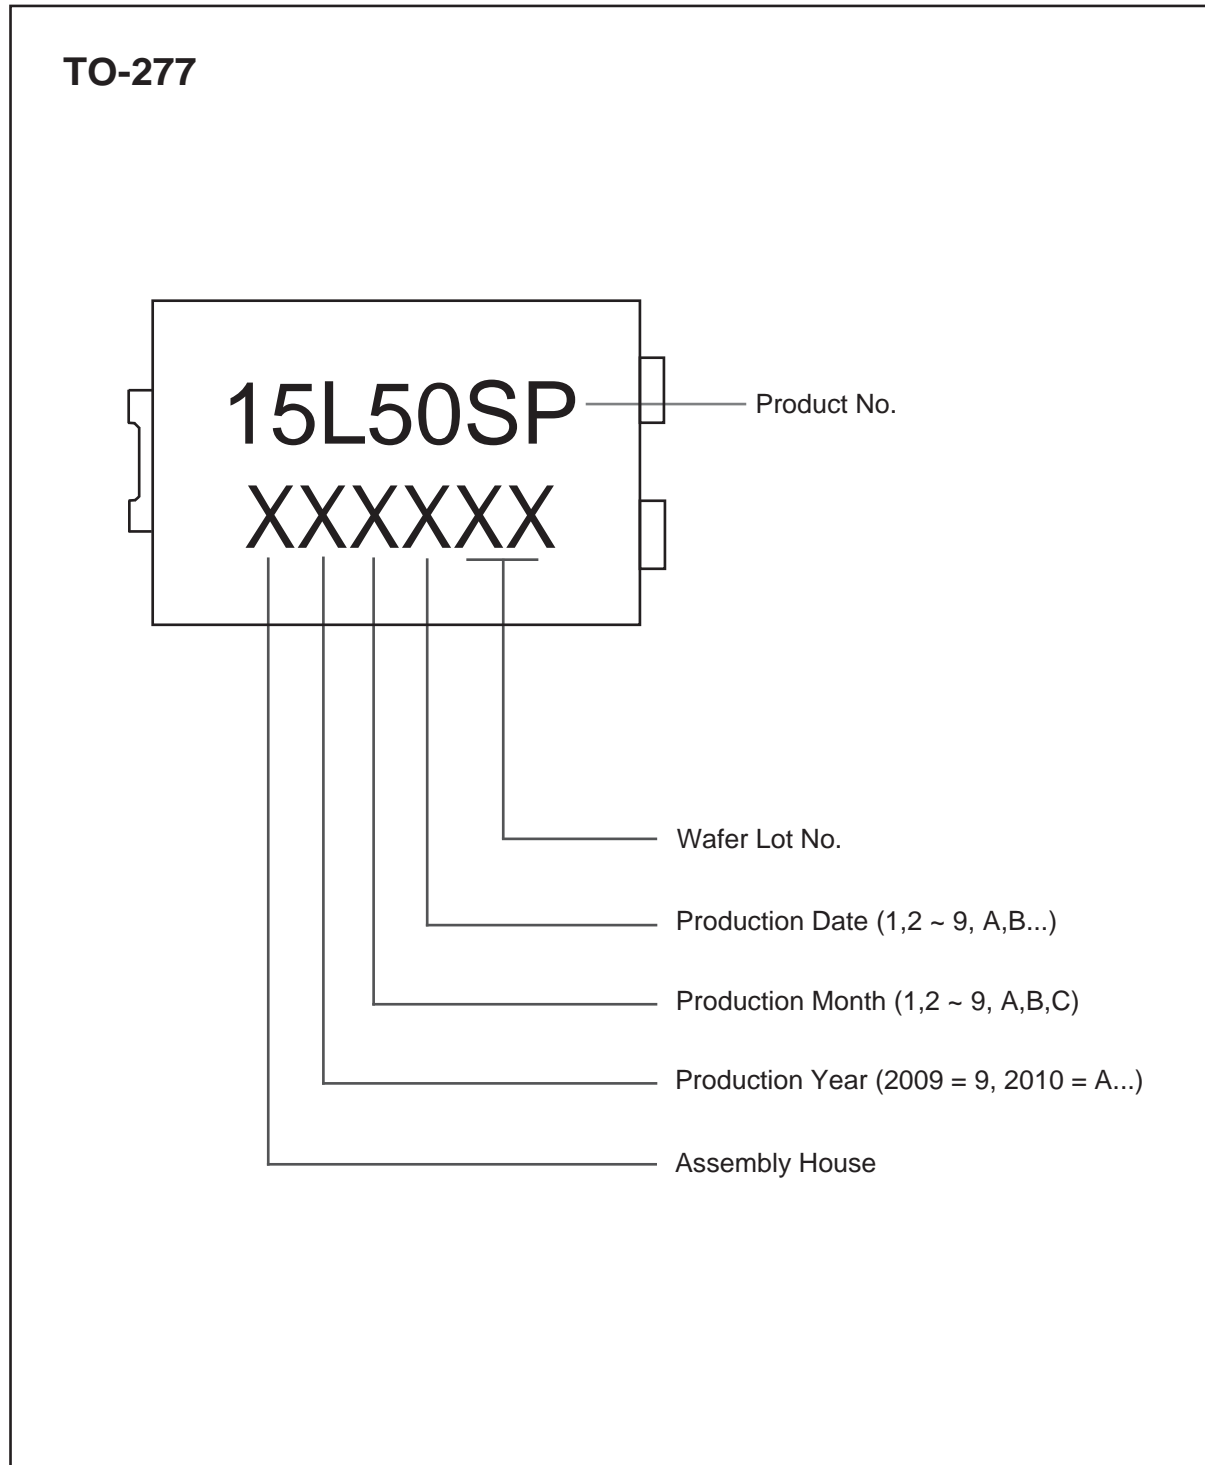

Jul,09,2014